


步驟一：請先找一台電腦然後將網路線從電腦的網路埠連接到 G-570S 的 Ethernet 埠

步驟二：請確定 G-570S 的燈號顯示皆正常(PWR 恆亮綠燈及 ETHERNET 亮橘燈或綠燈)


步驟三：開啓您的網頁瀏覽器(Internet Explore)→請在網址輸入“192.168.1.2” →
會出現步驟四的畫面




步驟四：請輸入“密碼>Password)” (預設密碼為“1234”)→請點選“登入(Login)”

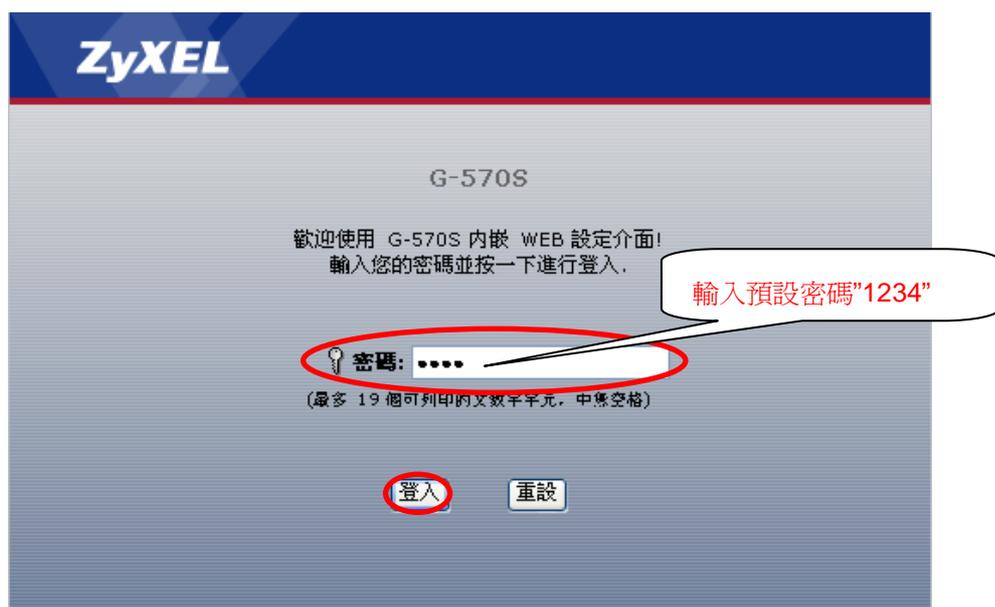

步驟五：請選取“中文(Chinese)” →請點選“套用(Apply)”

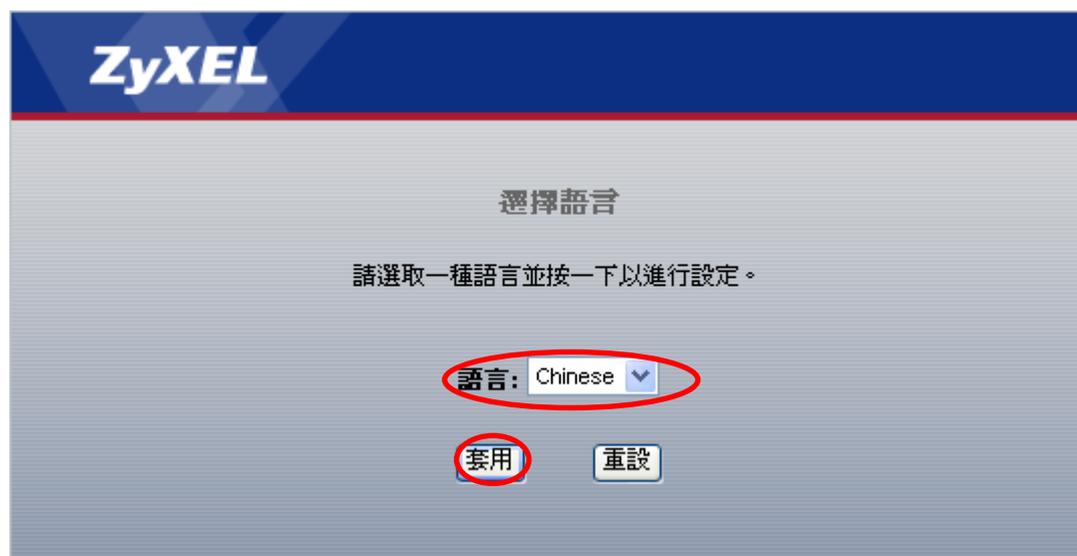

步驟六：請選擇“進入精靈模式”→請點選“套用”

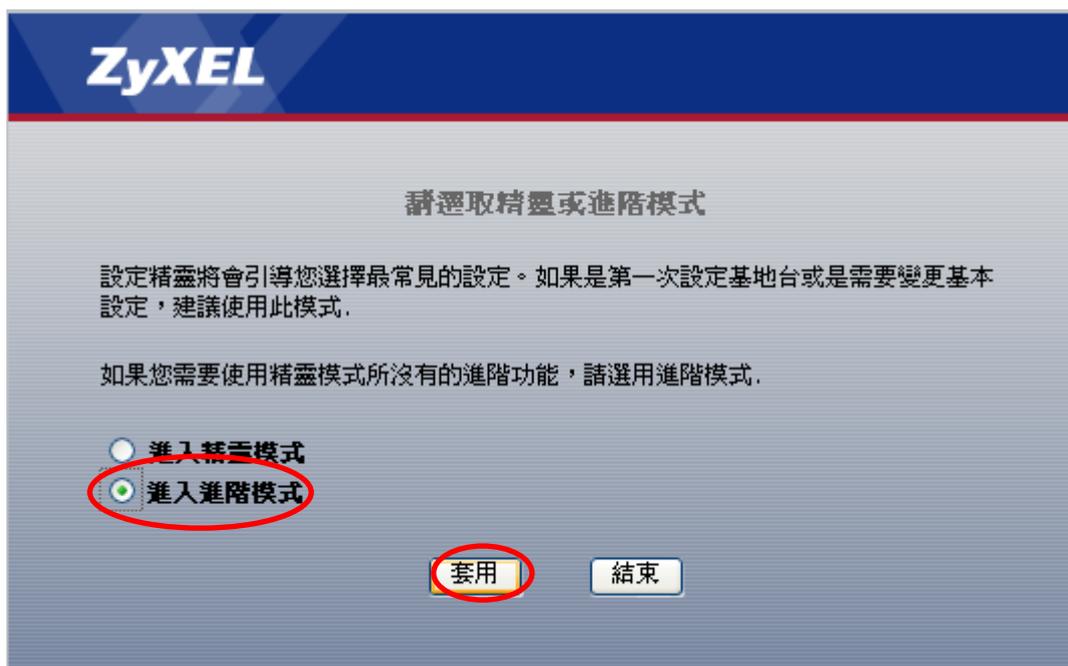

步驟七：請點選“無線”

兩端的 s s i d



步驟八：請在作業模式選擇“無線用戶端”→請在 SSID 輸入您的另一台無線基地台的 SSID 名稱→請點選“套用”

無線設定 安全性 OT1ST

基本設定

作業模式 無線用戶端

SSID ZyXEL (最多 32 個可列印字元) 勘察網路

進階設定

手動設定 MAC Clone 功能

無線電啟用 是 否

輸出電源管理 完整

資料速率管理 最佳

前序編碼類型 動態

Super-G 模式 啟用 停用

RTS/CTS 臨界值 2346 (0~2346)

分包 2346 (256~2346)

套用 重設

步驟九：請點選“安全性”→請在加密方式選擇與您所要連線的基地台相同之加密方式(步驟十將以 WEP 加密作為範例)

無線設定 安全性 OT1ST

安全設定

加密方式 停用

套用 重設

步驟十：請在加密方式點選“WEP”→請在資料加密選擇與您所連線的基地台相同之格式→並在金鑰 1 輸入與您所連線的基地台相同之加密金鑰→點選“套用”

The screenshot shows a web-based configuration interface for wireless security. At the top, there are three tabs: "無線設定" (Wireless Settings), "安全性" (Security), and "OT1ST". The "安全性" tab is selected. Below the tabs, the page title is "安全設定" (Security Settings). The main configuration area includes:

- 加密方式** (Encryption Method): A dropdown menu set to "WEP".
- 認證方式** (Authentication Method): A dropdown menu set to "開啓" (Enabled).
- 資料加密** (Data Encryption): A dropdown menu set to "64 位元 WEP".

Below these settings, there is a text instruction: "輸入通關密語以自動產生 WEP 密鑰，如果要手動輸入 WEP 密鑰，則保留空白" (Enter a passphrase to automatically generate WEP keys; if manually entering WEP keys, leave blank). This is followed by a "通關密語" (Passphrase) input field and a "製作" (Generate) button, with a note "(最多 16 個可列印的文數字字元)" (Maximum 16 printable alphanumeric characters).

Below the passphrase section, there are four key input fields labeled "金鑰 1" through "金鑰 4". The "金鑰 1" field is selected with a radio button and contains the text "12345".

At the bottom, there is a "注意:" (Note) section with the following instructions:

- 64 位元 WEP：輸入 5 個 ASCII 字元或 10 個十六進位字元 (「0-9」、「A-F」)
- 128 位元 WEP：輸入 13 個 ASCII 字元或 26 個十六進位字元 (「0-9」、「A-F」)
- 152 位元 WEP：輸入 16 個 ASCII 字元或 32 個十六進位字元 (「0-9」、「A-F」)

At the bottom right, there are two buttons: "套用" (Apply) and "重設" (Reset). The "套用" button is circled in red.