


寬頻路由器-設定 DynDNS 動態網域

DDNS (Dynamic Domain Name Service) 動態網域名稱伺服器，可以幫助您在沒有固定 IP 的狀況下(如使用 ADSL 或是 Cable Modem 上網)，仍可架設 NSA、網站、FTP、伺服器，它會自動偵測您目前設備上廣域網路的 IP 位址，並將網域名稱自動對應到目前的 IP 位址。


在設定 DDNS 功能時，您向 NSA 有支援 DDNS 的網站申請註冊，而我們將以 <http://www.DynDNS.com> 站為例：

步驟一：請至<https://www.dyndns.com/account/entrance/>申請註冊

步驟二：選 Sign In 點選 Create an Account

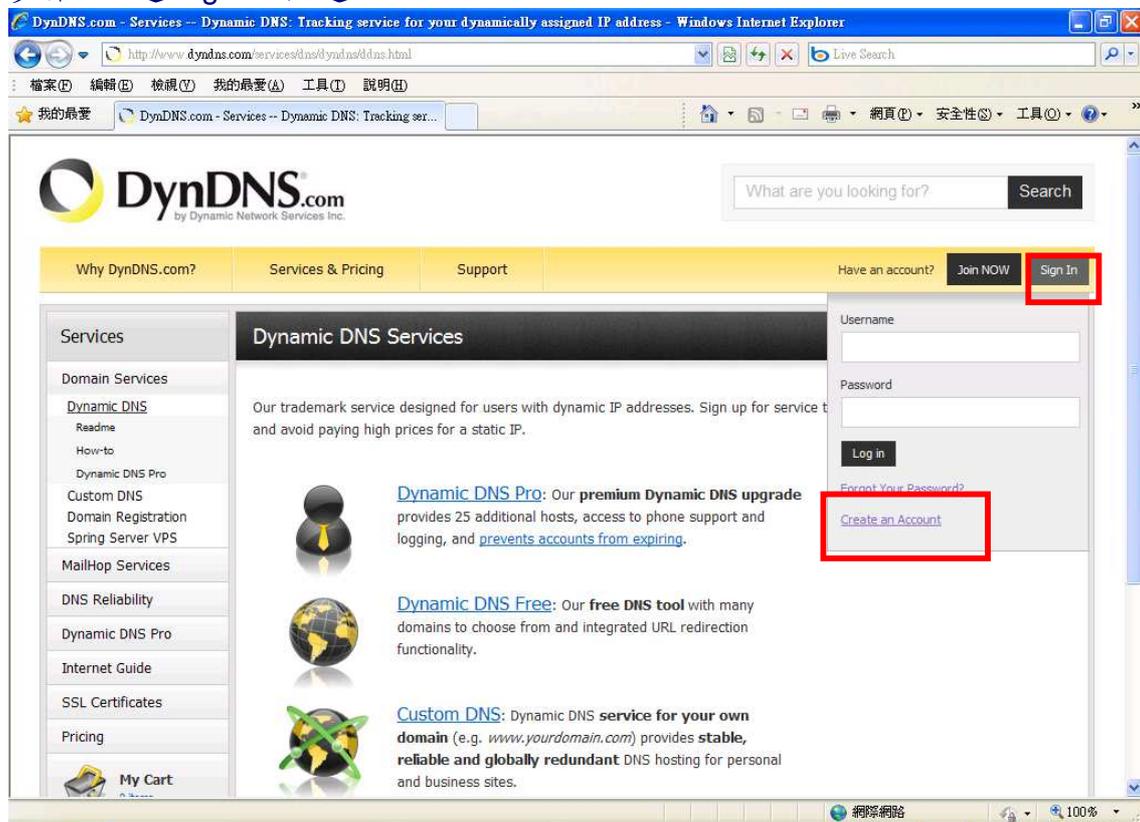

步驟三：login 建立登入帳號資料

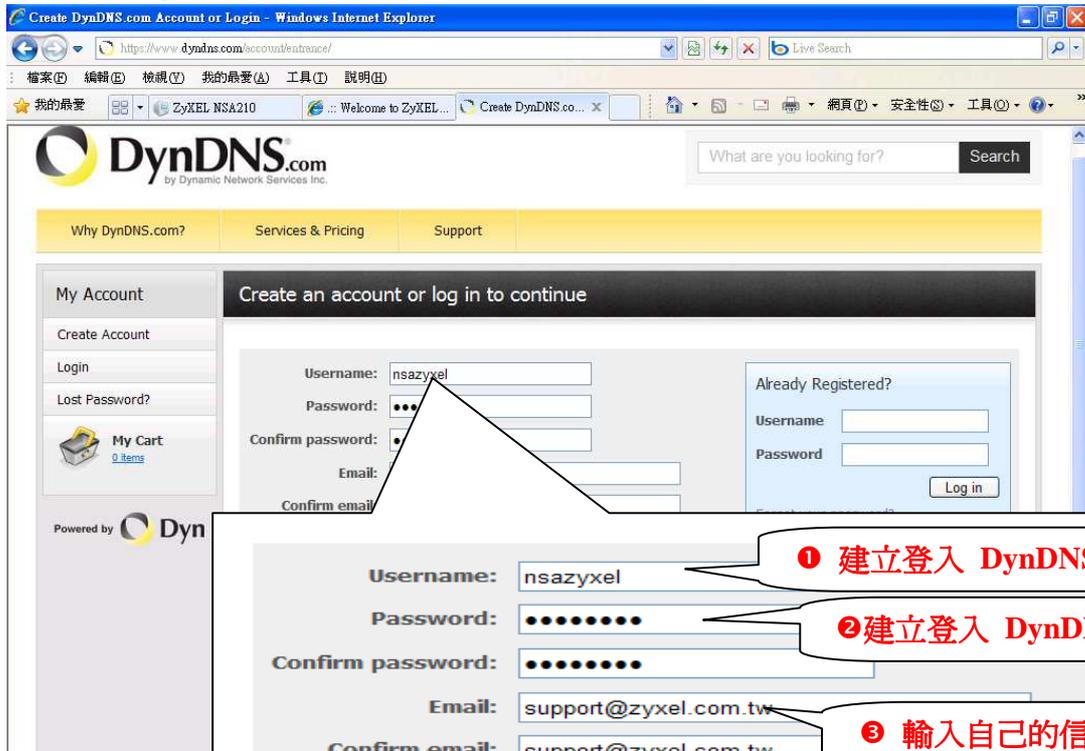

① 建立登入 DynDNS 的帳號


② 建立登入 DynDNS 的密碼

③ 輸入自己的信箱(E-mail)地


④ 輸入您看到驗證碼

⑤ 按下 Create Account

步驟四：Account Created 出現畫面表示您註冊的帳號及密碼已經被建立。
此網站會寄一封 E-mail 到您的信箱(E-mail)，引導您啟動註冊的帳號，而您必須在 48 小時之內完成您的註冊。

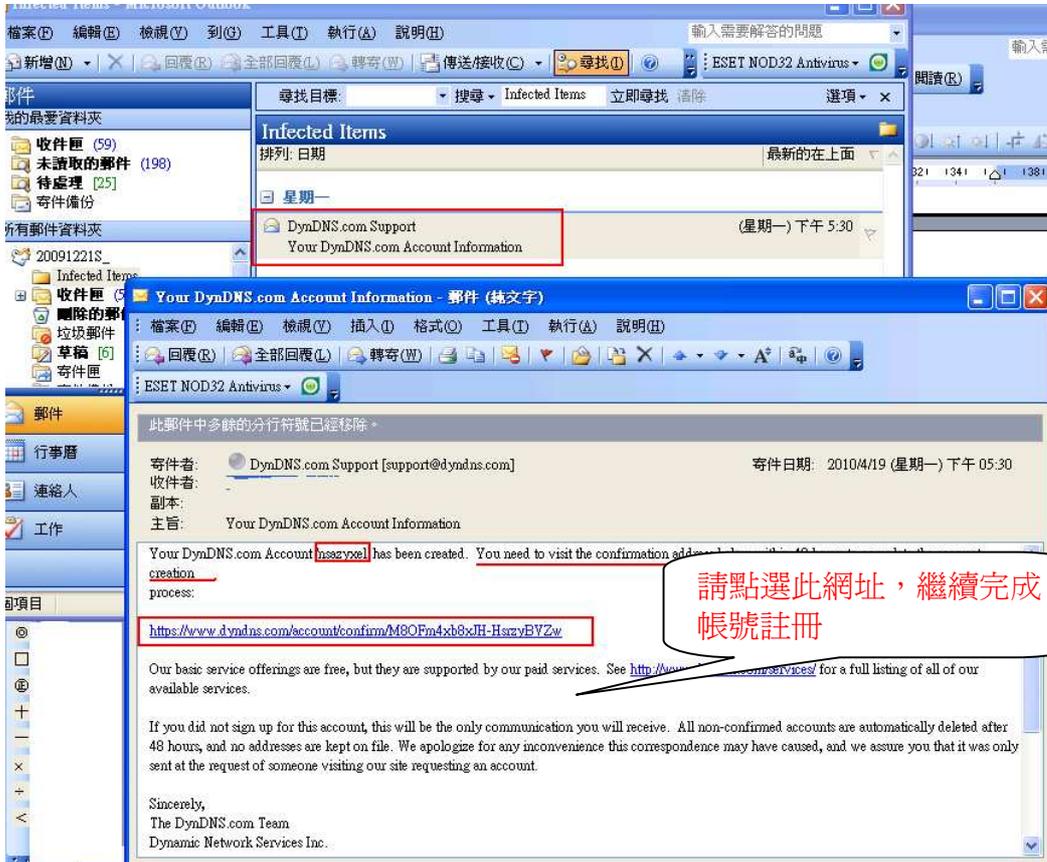

步驟五：輸入帳號/密碼後，請按下 Log In 登入

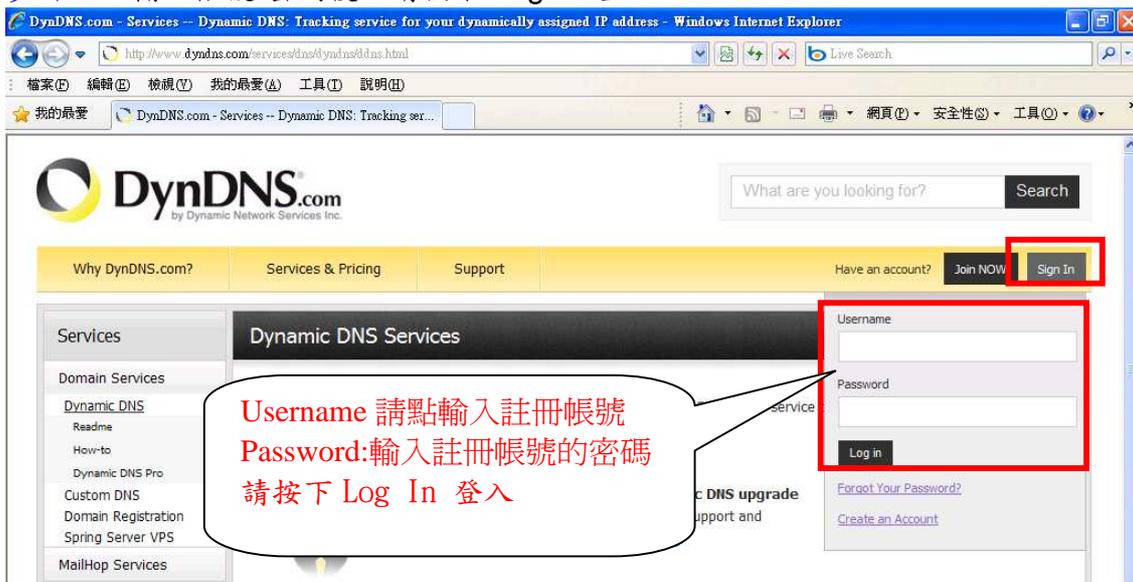

步驟六：請按下 Add Host Services

The screenshot shows the ZyXEL user interface. At the top, there is a navigation bar with links for 'Why DynDNS.com?', 'Services & Pricing', 'Support', and a welcome message 'Welcome nsazyxel (FREE)'. There are also buttons for 'My Services', 'My Cart', and 'Log Out'. Below the navigation bar is a banner for 'INTERNET GUIDE' with features like 'Web filtering', 'Anti-phishing', 'Anti-fraud', 'Anti-spyware', 'Anti-malware', 'Faster web experience', 'No network settings needed', and 'One-click install'. The main content area is divided into four columns: 'My Account', 'My Services', 'Billing', and 'Account Settings'. In the 'My Services' column, the 'Add Host Services' link is highlighted with a red box. Other links in this column include 'My Zones/Domains', 'Add Zone/Domain Services', 'My Hosts', 'Dynamic DNS Pro', 'Internet Guide', 'Spring Server VPS', 'MailHop Outbound', 'SSL Certificates', 'Recursive DNS', and 'Support'. The 'Billing' column contains links for 'View Shopping Cart', 'Active Services', 'Order History', 'Billing Profile and Vouchers', 'Renew Services', 'Auto Renew Settings', and 'Sync Expirations'. The 'Account Settings' column contains links for 'Change Email Address', 'Change Password', 'Change Username', 'Contact Manager', 'Mailing Lists', 'Move Services', 'Preferences', and 'Close Account'.

The screenshot shows the DynDNS.com user interface. At the top, there is a search bar with the text 'What are you looking for?'. Below the search bar is a navigation bar with links for 'Why DynDNS.com?', 'Services & Pricing', 'Support', and a welcome message 'Welcome nsazyxel (FREE)'. There is also a 'My Account' button. The main content area is divided into two columns: 'My Account' and 'Host Services'. In the 'My Account' column, the 'Host Services' link is highlighted with a red box. Other links in this column include 'My Services', 'Dynamic DNS Pro', 'Internet Guide', 'SLA', 'Premier Support', 'Zone Level Services', and 'Spring Server VPS'. The 'Host Services' column contains the text 'No Hostnames Registered' and a link 'Add New Hostname' which is highlighted with a red box. Below this, there is a link '» Host Update Logs'. At the bottom of the 'Host Services' column, there is a link 'Join the discussion in the DynDNS Community for tips and tricks, demos, suggestions, user help and much more' and a link 'Check out what our users are talking about below:'. The DynDNS.com logo is visible in the top left corner.

步驟七：建立您的網域名稱

The screenshot shows the 'Add New Hostname' page in the ZyXEL DynDNS interface. The page includes a navigation bar with links like 'Why DynDNS.com?', 'Services & Pricing', and 'Support'. A left sidebar lists 'My Account' and 'My Services' options. The main content area is titled 'Add New Hostname' and contains the following fields and options:

- Hostname:** A text input field containing 'zyxelnsa' and a dropdown menu set to 'dyndns.org'. A callout bubble points to this dropdown with the text '自訂網域名稱'.
- Wildcard Status:** A label 'Disabled' with a link '[Want Wildcard support?]'. A callout bubble points to this section with the text '請選擇 Host with IP address'.
- Service Type:** Three radio button options: 'Host with IP address [?]' (which is selected), 'WebHop Redirect [?]', and 'Offline Hostname [?]'. A callout bubble points to this section with the text '請選擇 Host with IP address'.
- IP Address:** A text input field containing '118.168.88.30'. Below it, a note reads 'Your current location's IP address is 118.168.88.30' and 'TTL value is 60 seconds. Edit TTL.'. A red box highlights this entire section, with a callout bubble pointing to it containing the text '請選擇 Host with IP address'.
- Mail Routing:** A checkbox labeled 'Yes, let me configure Email routing. [?]'.

Below the main form, there is a section titled 'What do you want to use this host for?' with the instruction 'Select services and devices you would like to use with this hostname.' This section contains three categories of services, each with several button-like options:

- Work From Home Office or VPN:** vpn, remote file access, remote desktop, mail server, web server, chat server, ftp backup, ssh, database, voip.
- Hosting and Design For Web Sites and Blogs:** blog, gallery, wiki, portfolio, ecommerce, web page.
- Remote Access For Devices:** dvr, webcam, data storage, cctv, printer, alarm ar, thermostat, weather station, game server, home automation.

A red box highlights the 'Add To Cart' button at the bottom right of this section, with a callout bubble pointing to it containing the text '請選擇 Add To Cart'.

步驟八：加入後按下 Next>>

步驟九：加入後按下 activate services>> 啟用該服務

即可看到目前 Zyxelnsa.dyndns.org 對應到 NSA

DynDNS.com by Dynamic Network Services Inc.

What are you looking for? Search

DynDNS.com? Services & Pricing Support Welcome nsazyxel (FREE) My Account My Cart Log Out

Host Services [↑ My Services](#)

zyxelnsa.dyndns.org successfully activated.

Hostname	Service	Details	Last Updated
zyxelnsa.dyndns.org	Host	220.128.160.37	Apr. 21, 2010 6:39 AM

[» Host Update Logs](#) [Add New Host](#)

Join the discussion in the [DynDNS Community](#) for tips and tricks, demos, suggestions, user help and much more.

寬頻路由器設定方式

步驟一：請輸入路由器密碼後，按下登入按鈕

ZyXEL

NBG-419N

歡迎使用路由器設定介面。請輸入密碼，並按一下「登入」。

密碼：
(最多 30 個文字或數字字元，中間請不要有空格)

語言：

8°C 格林威治 02:40:56 2010-09-22

(C) Copyright by ZyXEL Communications Corp.

步驟二：點選**專家模式**，進行細項設定。




步驟三：點選**管理**→**遠端管理**選項，將伺服器存取選取**LAN&WAN**，請按下**Apply(套用)** 按鈕。



步驟四：點選**網路**→**DDNS** 選項，勾選啟用動態 DNS，選取向 DDNS 註冊的組織，主機名稱：輸入申請的網域名稱，使用者名稱為登入該 DDNS 的註冊帳號，密碼為讓 DDNS 註冊時的密碼，輸入完成後，請按下 **Apply(套用)** 按鈕。



步驟五：開瀏覽器並於網址輸入<http://zyxelnsa.dyndns.org> 即可從網際網路去存取 NBG419N 的寬頻路由器。

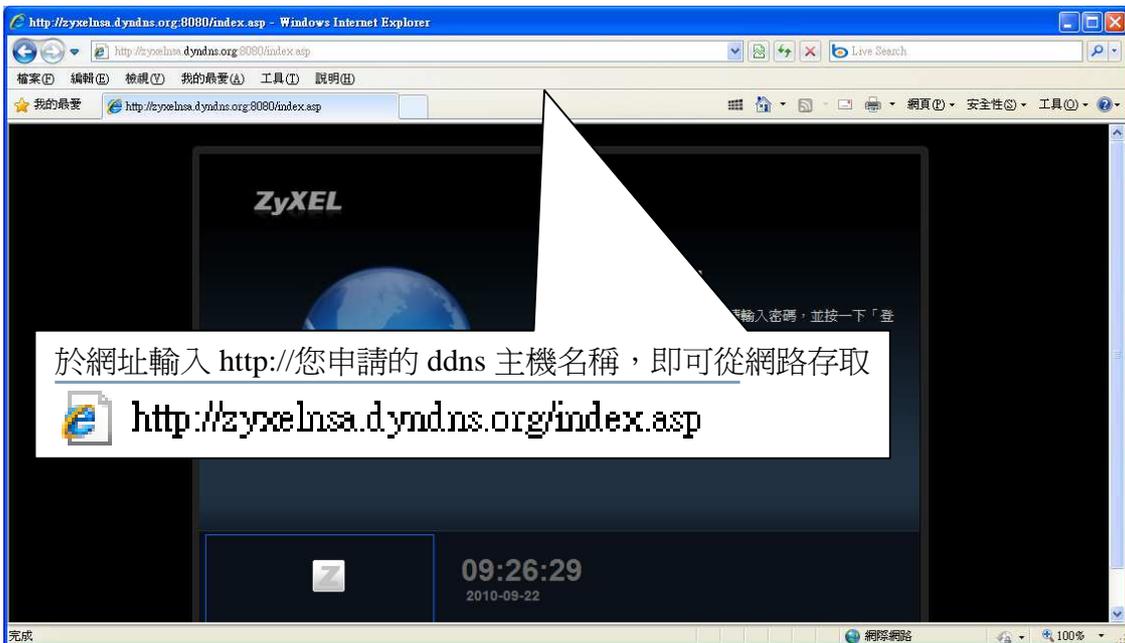

~The End~