


P-334 關閉 DHCP 功能

關閉 DHCP 功能後，P-334 將不再配發虛擬 IP 給電腦使用，如您需要連線至 P-334 的設定頁面(<http://192.168.1.1>) 進行設定，請將電腦端設定成固定 IP 位址 192.168.1.33(相同網段位址)，預設閘道請設為 192.168.1.1；或是將 P-334 Reset 回原廠預設值(Reset 方式，按壓設備後的 Reset 小孔約十秒鐘，當全部燈號熄滅即可放開；等待 PWR 燈號恢復恆亮綠燈，P-334 即恢復為原廠預設值。)


步驟一：請確認您的電腦已經正確連接到 P-334 的 LAN 孔上，請開啓您的網頁瀏覽器(Internet Explorer)→請在網址列鍵入“<http://192.168.1.1>”，即會出現步驟二的圖①畫面。



步驟二：預設登入密碼為“1234”，如果沒有更改過請直接按下登入(Login)後進入圖②的畫面。

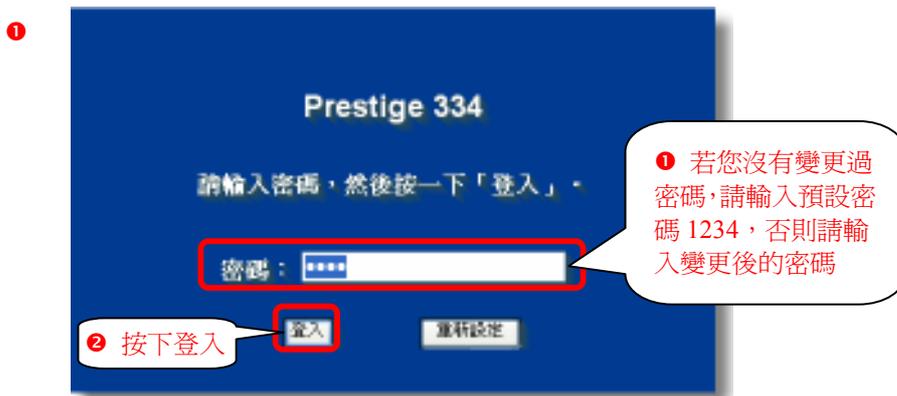

步驟三：此時會要求您變更密碼，您可以變更登入的密碼，變更後請點選“套用(Apply)”，如不變更請直接點選“略過(Ignore)”。(若您沒有更改過登入密碼，在您每次登入進行設定時，設備都會詢問您是否需要變更密碼。)

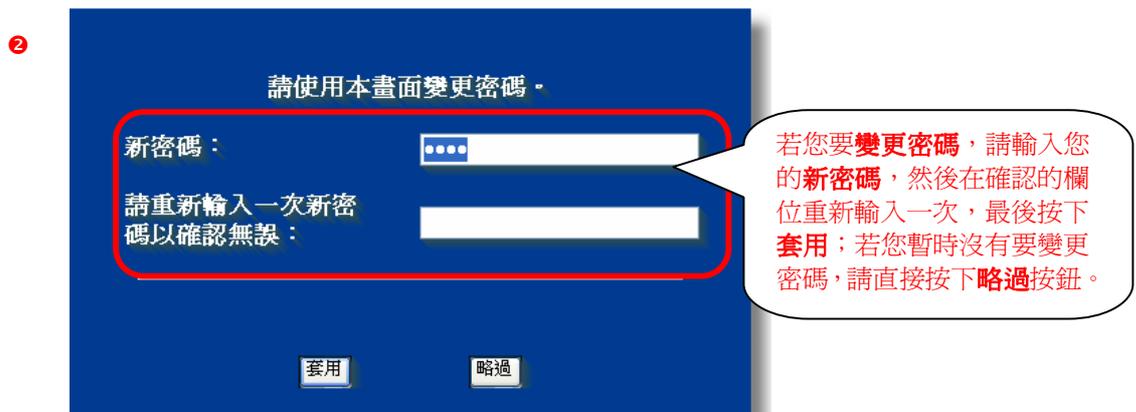

步驟四：若您的頁面為英文的，進入主選單的畫面後，請選取“繁體中文”為語言項目，若您的頁面已為中文頁面，請直接進入步驟五。

主選單

歡迎使用 ZyXEL 內建式網路設定工具。

- 按一下「設定精靈」，開始設定您的系統以連接網際網路。
- 按一下「設備維護」可存取更多的維護子選單。

請選擇您需要的語言



步驟五：請在左邊選單“進階”底下點選“區域網路”。

The screenshot shows the ZyXEL web interface for configuring network settings. The interface is in Chinese. The left sidebar has a menu with "區域網路" (LAN) selected, indicated by a red box and callout "1 點選區域網路". The main content area is titled "區域網路" and has three tabs: "IP", "靜態 DHCP", and "IP 劃分". The "IP" tab is selected, indicated by a red box and callout "2 點選 IP". Under the "DHCP 設定" section, the "DHCP 伺服器" checkbox is unchecked, indicated by a red box and callout "3 將 DHCP 伺服器選項勾消". The "區域網路 TCP/IP" section has the "應用" (Apply) button highlighted with a red box and callout "4 按下套用". At the bottom of the page, a status message "Status: Configuration updated successfully" is shown in a red box, with a callout "5 套用成功會顯示" pointing to it.